

(12) UK Patent Application (19) GB (11) 2 368 621 (13) A

(43) Date of A Publication 08.05.2002

(21) Application No 0026644.5

(22) Date of Filing 31.10.2000

(71) Applicant(s)
IMI Cornelius (UK) Limited
(Incorporated in the United Kingdom)
Tything Road, Alcester, BIRMINGHAM, B49 6EU,
United Kingdom

(72) Inventor(s)
Graham Williams

(74) Agent and/or Address for Service
Barker Brettell
138 Hagley Road, Edgbaston, BIRMINGHAM,
B16 9PW, United Kingdom

(51) INT CL⁷
B67D 1/07, B08B 9/02


(52) UK CL (Edition T)
F2N N2A
C1C CTAX C446

(56) Documents Cited
GB 1562274 A GB 1517923 A
EP 1025917 A1 EP 0245641 A1

(58) Field of Search
UK CL (Edition S) B8N NJX , F2N
INT CL⁷ B67D 1/07
Online: WPI, EPODOC, PAJ


(54) Abstract Title
Water treatment apparatus

(57) Water treatment apparatus has a reservoir 12 for receiving and storing purified water until required, for example in a beverage dispenser. The water is purified by heating in housing 10 and is cooled in heat exchanger 11 prior to delivery to the reservoir 12. The reservoir 12 includes a heating element 32 for heating the purified water and passing steam generated in the reverse direction back through the heat exchanger 11 to the housing 10 to sanitise the apparatus.

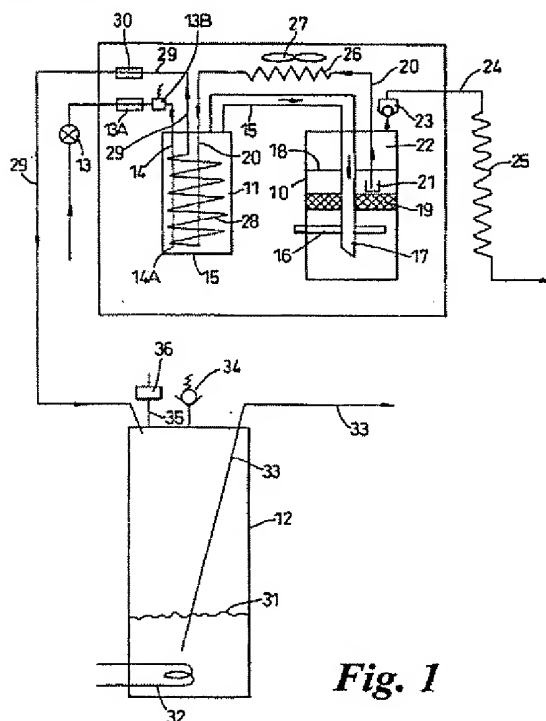

At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.
The claims were filed later than the filing date but within the period prescribed by Rule 25(1) of the Patents Rules 1995.

GB 2 368 621 A

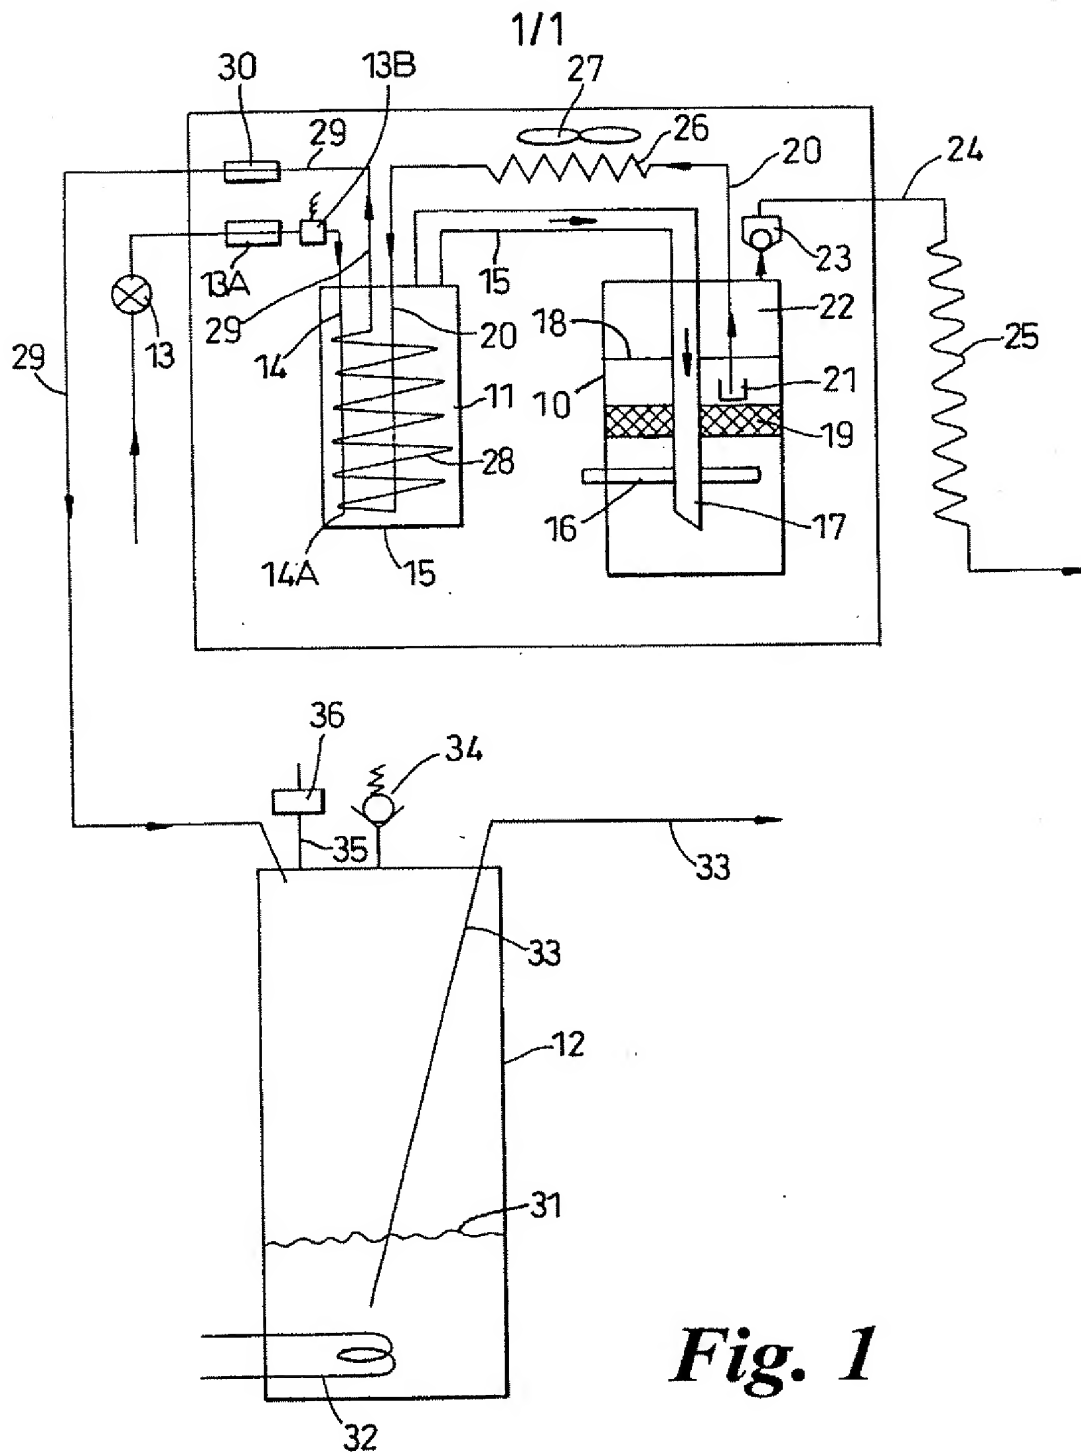

WATER TREATMENT APPARATUS

This invention relates to a water treatment apparatus and is particularly concerned to provide a water treatment apparatus that can
5 readily be sanitised by the passage of steam through it.

The invention is also particularly concerned with water treatment apparatus in which water is purified and is intended for use in a post-mix beverage dispenser and, although not intended to be limited thereto, the invention will be more specifically described below with reference
10 to purifying water for post-mix beverages.

Water treatment apparatus for post-mix beverages is well known. For example it is known from US 4 844 796 to provide a water treatment apparatus for post-mix beverage dispensers in which the water to be treated is passed into a removable disposable cartridge having a
15 first, reactor section and a second, filter section wherein the water is heated in the reactor section firstly by passing through a heat exchanger and secondly by means of a heater. The heater is positioned in a central aperture defined by an annular portion of the cartridge whereby it does not come into direct contact with the water.

20 A similar heater arrangement is disclosed in US 5 858 248 where the heater can be located in the central cavity of a disposable cartridge of a water treatment device. Alternative heater arrangements disclosed in this application are to position the heater around the outer cylindrical surface of the cartridge or to have a gas cylinder heater beneath a central
25 "chimney", i.e. the central cavity defined by the annular portion of the cartridge.

In our international patent application No. PCT/GB 00/03329 we have described and claimed a water treatment apparatus having an inlet for the water to be treated, an outlet for the treated water, a heater within the housing to come into direct contact with the water and a filter
5 between the heater and the outlet, and means to fill the housing with water up to a maximum level which leaves a headspace between the water and the roof of the housing, the entrance to the outlet being below the operating water level.

In most of the previously suggested water treatment apparatus
10 arrangements, it is usual for the purified water to be passed to a reservoir, possibly via a cooler, and the purified water is drawn off from the reservoir as required, e.g. for mixing with a concentrate to form a post-mix drink. The reservoir may conveniently be a flexible container, e.g. a collapsible bag.

15 It will be appreciated that the water treatment apparatus, regardless of its specific construction, must from time to time be sanitised to ensure that no unwanted contamination, particularly bacterial contamination, can harmfully affect the treated water.

Various means of achieving the desired sanitisation, of varying
20 degrees of complexity and success, have been proposed. It is an object of the present invention to provide an improved means of achieving the desired sanitisation.

Accordingly, the invention provides a water treatment apparatus comprising a treatment housing through which the water is passed, the
25 housing being connected to a reservoir for the treated water from the housing, the reservoir containing a heater to heat the treated water to generate steam, controls to start and stop flow of water to be treated

through the housing and to switch on the reservoir heater and to stop the flow of water when sanitisation is required, whereby steam may be passed through the apparatus in the reverse direction to the water, the housing having a relief valve for escape of the steam from the reservoir.

5 Clearly the construction of and material from which the reservoir is made must be sufficiently strong to withstand the steam pressure and temperature when the reservoir heater is used. For example, a rigid metal or plastic reservoir should be able to withstand a pressure of at least one bar and a temperature up to about 120°C.

10 The treatment housing may conveniently be in the form of a disposable cartridge although this is not essential. The treatment for the water passing through the housing will usually comprise a heater, which may be in direct or in indirect contact with the water and a filter between the heater and the outlet from the housing. It may additionally comprise
15 one or more perforated screens or meshes between the heater and the filter.

 The outlet from the treatment housing, which leads to the reservoir, may conveniently be through the closed upper end of the housing e.g. of the cartridge or other cylindrical housing construction.

20 The housing preferably has one or more probes or other means to detect the water level therein whereby the water may be filled up to a maximum level to leave a headspace in the filled housing. The outlet from the housing preferably extends beneath the level of the water so that hot water leaving the housing does not go through the headspace.
25 Steam and volatiles collect in the headspace during normal operation of the apparatus and these may be allowed to escape through a pressure

relief valve, which may be the same pressure relief valve used to vent the steam during the sanitisation mode.

The untreated water, which may be mains water, may first pass through a heat exchanger to warm it before it passes into the housing.
5 Treated heated water leaving the housing may be passed in the opposite direction through the heat exchanger to act as the heat exchange medium to warm the incoming mains water. The treated water is, thereby, conveniently cooled before being passed to the reservoir.

In another preferred embodiment the heat exchanger and the
10 water treatment housing may be contained in a single unit, preferably with the heat exchanger directly beneath the water treatment housing. This may be a unitary structure or two separate units, water treatment housing and heat exchanger, which may be completely or partially disposable. For example, the water treatment housing may be a
15 disposable cartridge and the heat exchanger non-disposable.

This single unit arrangement has the advantage that pipework between the heat exchanger and the water treatment housing can be considerably reduced, if not eliminated. The heated water from the heat exchanger may pass directly into the water treatment housing and the
20 treated water from the housing can pass directly back to the coils of the heat exchanger in order to heat the incoming water. This arrangement reduces the regions where precipitation deposits may build up and harmfully affect water flow. Also, with the heat exchanger directly below the water treatment housing, the inlet to the water treatment
25 housing can readily enter at its cooler, lower end.

The inlet for the water to be treated may conveniently enter through the floor of the treatment housing but this is not essential. For

example, in some embodiments the water to be treated may enter the housing through a pipe entering the housing through or near the roof, which pipe extends downwardly inside the housing towards its base. On leaving the pipe, the water, once the housing is filled to the lower end of the pipe, will then travel upwardly.

It will be appreciated that, where a heat exchanger is used as described above, the steam generated in the reservoir in the sanitisation mode will pass through the heat exchanger before reaching the housing and hence will also sanitise the heat exchanger.

The heater in the treatment housing will have a wattage capacity determined by the volume of water to be treated and the throughput of the treatment housing. For example, a heater of from 1000 to 2000 watts can usefully be employed for a throughput of 12 to 18 litres per hour, i.e. the input of water into the treatment housing.

The heater in the reservoir, which may be, e.g. an immersion heater, will similarly require a wattage dependent on the capacity of the reservoir, e.g. for a capacity of from 20 to 50 litres, a wattage of from 1500 to 2500 would be suitable.

The reservoir with the heater may be a small secondary tank primarily for sanitisation purposes and a separate larger reservoir downstream of the secondary tank may be employed, if desired.

The control to start and stop flow of untreated water into the treatment housing may be a simple on/off valve, e.g. on the mains supply pipeline. The control to switch on the heater in the reservoir may be co-ordinated so as to be timed to operate shortly after the flow of untreated water is stopped or, alternatively, the flow of water may be stopped at the same time or shortly after the reservoir heater is switched

on. The outlet from the reservoir should be closed when the reservoir heater is in use, except as described below where it is desired to sanitise any equipment downstream of the reservoir. The control means preferably ensures that steam cannot be generated in the reservoir to reach a pressure at which it is forced to travel through the apparatus in the opposite direction to normal water travel until the water flow has been switched off. Water, condensed steam and steam may all be forced through the pressure relief valve in the treatment housing during the sanitisation process.

10 The pressure relief valve may operate, for example, at about 0.7 bar. It may be, for example, a spring-loaded or a dead weight valve of the types well known in the art. The pressure relief valve may lead to a condenser tube so that steam and unwanted volatiles can be cooled before being allowed to drain away.

15 Embodiments of the invention will now be described with reference to the accompanying drawing (Figure 1) which is a schematic arrangement of one form of apparatus according to the invention.

 The water treatment apparatus of Figure 1 has a treatment housing 10, a heat exchanger 11 and a reservoir 12 for the treated water. An inlet solenoid 13A controls supply of untreated, usually mains, water into the heat exchanger 11. (The direction of water flow through the apparatus during normal treatment procedure is shown by the arrows.) When the inlet solenoid is operated to allow water inflow, the untreated water then passes via the mains water stop valve 13, valve 13A and a pressure regulator 13B into an inlet tube 14 which extends through the top of roof of heat exchanger 11 and extends down inside the heat exchanger to a position a little above its base 15. Water exits from the

lower end 14A of tube 14 and, when the heat exchanger is filled with water, it exits from tube 15 in its roof. Heat exchanger 11 also contains a return coil 28 to receive treated water from housing 10 and this is described in more detail below.

5 Inside water treatment housing 10 is a high density electric heating element 16 of, say, 1500 watts capacity in the lower half of the housing. Element 16 is connected to conventional electrical circuiting (not shown) whereby the heater can be switched on and off as required.

10 Untreated water entering housing 10 from tube 15 passes down a larger internal diameter tube 17 which extends to the lower half of the housing. Incoming water fills housing 10 to a maximum level 18 controlled by one or more probes (not shown). The water, therefore, surrounds heater 16 and can be heated thereby.

15 Surrounding tube 17 and spaced above heater 16 is a filter 19. Heated water is forced upwardly through the filter by the pressure of incoming water up to level 18. The heated water leaves housing 10 via a tube 20 through its upper end. Tube 20 extends below water level 18 and receives the heated water from a "quiet zone" defined by a tray 21 beneath the water level 18. Delivery pressure of the treated water into tube 29 is governed by the boiling taking place in the headspace 22 above water level 18 and is controlled by pressure relief valve 23 which allows hot water and/or steam with unwanted volatiles from the treated water to escape into relief tube 24 and cooling coil 25 when the internal pressure in the housing exceeds a predetermined value, e.g. 0.7 bar.

20 From tube 25 the condensate passes to a drain.

25 The hot treated water passes through tube 20 via a cooling tube 26 and fan 27 into heat exchanger 11. Tube 20 communicates into coil 28

near base 15 of the heat exchanger and the treated water passes up the coil 28 to exit through tube 29 through the heat exchanger roof. The treated water, therefore, exchanges heat with the cooler incoming untreated water inside the heat exchanger. Tube 29 leads via an outlet
5 solenoid valve 30 into reservoir 12.

The water is shown having reached a level 31 in reservoir 12, which contains a heater 32 near its base. An outlet tube 33 extends below the water level and is the dispense means of treated water from the reservoir.

10 The roof of the reservoir 12 contains a pressure relief valve 34 set, for example, at about 1 bar, for safety purposes and an air vent 35 containing a filter 36. This venting arrangement allows smooth filling of the reservoir while preventing unwanted contamination from entering.

15 When it is desired to sanitise the apparatus, flow of water into the apparatus is switched off by closing inlet solenoid 13A. Reservoir heater 32 is switched on with outlet 33 closed, thereby generating steam in the headspace above water level 31. The pre-cool fan 27 is switched off. Outlet solenoid 30 is maintained open. Steam generated in the
20 reservoir passes in the reverse direction to the normal water flow direction through tube 29, coil 28 of the heat exchanger 11, cooling tube 26 and tube 20 into the treatment housing 10. When sufficient pressure is generated in the heat exchanger, steam and/or condensed water is vented through relief valve 23, line 24 and condenser 25 to drain away.

25 The arrangement may be automatically controlled by a thermistor (not shown) in the housing 10 which can switch off the reservoir heater when a predetermined temperature is reached.

Normal water treatment may then be resumed.

If desired steam and hot water may also be sent downstream by opening outlet 33 of the reservoir during the sanitisation process to sanitise the downstream equipment, e.g. the post-mix apparatus.

- 5 The apparatus of the invention has significant advantages in that:
- it does not require chemicals for sanitisation;
 - it can readily be adapted for existing apparatus; and
 - it can be partly or fully automated, as desired.

CLAIMS

1. A water treatment apparatus comprising a treatment housing through which the water is passed, the housing being connected to a
5 reservoir for the treated water from the housing, the reservoir containing a heater to heat the treated water to generate steam, controls to start and stop flow of water to be treated through the housing and to switch on the reservoir heater and to stop the flow of water when sanitisation is required, whereby steam may be passed through the apparatus in the
10 reverse direction to the water, the housing having a relief valve for escape of the steam from the reservoir.
2. A water treatment apparatus according to Claim 1, in which the reservoir is of metal or plastic and can withstand a pressure of at least one bar and a temperature up to 120°C.
- 15 3. A water treatment apparatus according to Claim 1 or 2, in which the housing is a disposable cartridge.
4. A water treatment apparatus according to Claim 1, 2 or 3 in which the housing contains a heater to heat the water to be treated and a filter between the heater and an outlet from the housing for the treated water.
- 20 5. A water treatment apparatus according to Claim 4, which contains one or more perforated meshes or screens between the heater and the filter.
6. A water treatment apparatus according to any preceding claim, in which the housing has a probe to detect the water level and the
25 apparatus controls are arranged to switch off incoming water when a predetermined maximum water level is reached, the maximum level leaving a headspace in the housing above the water.

7. A water treatment apparatus according to Claim 6, in which the relief valve for the steam from the reservoir is positioned so as to allow escape from the headspace of steam and volatiles from the treated water.
8. A water treatment apparatus according to any preceding claim,
5 which includes a heat exchanger connectable to a source of untreated water between the source and the treatment housing whereby untreated water can be passed through the heat exchanger on its way to the treatment housing, the heat exchanger being also connected to an outlet from the treatment housing whereby heated treated water can be passed
10 through the heat exchanger in heat exchange relationship with the incoming untreated water.
9. A water treatment apparatus according to any preceding claim, in which the reservoir heater has a wattage of from 1500 to 2500 and the reservoir has a capacity of from 20 to 50 litres.
- 15 10. A water treatment apparatus according to any one of Claims 1 to 8, in which the reservoir with the heater is a small secondary tank and the apparatus includes a separate larger reservoir downstream of the tank.
11. A water treatment apparatus according to any preceding claim, in
20 which the controls are arranged to switch on the reservoir heater at the same time or shortly after flow of untreated water into the housing is stopped.
12. A water treatment apparatus according to any preceding claim, in which the pressure relief valve is of the spring-loaded or dead weight
25 type.

13. A water treatment apparatus according to any preceding claim, in which the pressure relief valve leads to a condenser tube and then a drain.

14. A water treatment apparatus according to Claim 1, substantially
5 as hereinbefore described with reference to and as shown in the accompanying drawings.



Application No: GB 0026644.5
Claims searched: 1-14

Examiner: John Wilson
Date of search: 26 June 2001

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.S): F2N; B8N[NJX]

Int Cl (Ed.7): B67D 1/07; B08B 9/02

Other: Online:- WPI, EPODOC, PAJ

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	GB 1562274 Cadbury-Schweppes	
A	GB 1517923 Cadbury-Schweppes	
A	EP 1025917 A1 Mertens et al	
A	EP 0245641 A1 Soffientini Pierluigi	

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	B	Patent document published on or after, but with priority date earlier than, the filing date of this application.